


Heater for the bathroom radiator  
GTL type Series 57



Anti-freeze mode

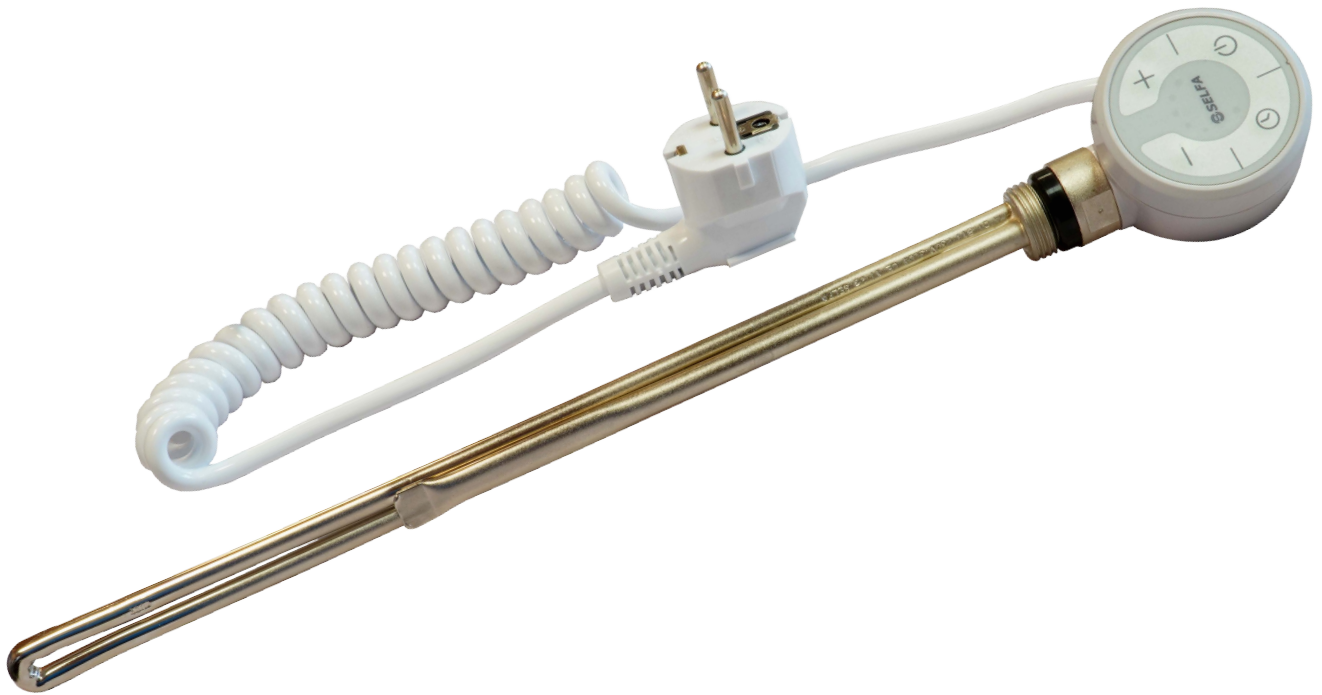

Two-hour drying function



5 temperature settings



Double overtemperature protection



Temperature control range  
30-60°C



Polish product

Fits bathroom radiators fitted with a 1/2" threaded hole

## Specification

**Power supply:** 230V/50Hz

**Protection class of the device:** Class I

**Radiator connection:** 1/2"

**Protection degree of the housing [IP]:** IPx5

The device offers five different temperature settings ranging from 30°C to 60°C, and an electronic sensor in the heater enables the chosen temperature to be precisely maintained. The current temperature level is shown on the display for ongoing monitoring. In addition, the heater has very low standby power consumption.

The drying function allows the user to set any heating temperature for a period of two hours, after which the heater automatically returns to its previous state. In the event of a power interruption, the unit remembers the last set temperature, allowing it to work with external timers and smart home systems.

The heater is equipped with anti-freeze protection and double protection against excessive radiator temperature rise. In addition, it signals any alarm statuses and has active protection in the event of dry radiator operation.

When installing the heater in a radiator connected to the central heating system, it is recommended to use a tee or a special valve integrated into the tee. Remember that the operating temperature of the central heating system should not exceed 82°C.

## Table of types

Heater	Colour	Thread	Wire	Power [W]	Length [mm]
GTL	White	1/2"	Spiral	300	300
				400	335
				600	365

Other capacities, housing colours and finishes (wires, tees, grilles, etc.) available for larger orders.